

4 - profile Chip Scale Package.

Features

- Four and Eight Channels of ESD Protection
- TM Coated for Improved Reliability
- \pm

CM1220

Table 4. ELECTRICAL OPERATING CHARACTERISTICS

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|--------|-----------|------------|-------|-----|-----|-------|
| | | | | | | |
| | | μ | | | | |
| | | | | | | μ |
| | | | - | - | - | |
| | - | | \pm | | | |
| | - - - | | \pm | | | |
| | - - - - | | | | | |


CM1220

APPLICATION INFORMATION

WLCSP5, 0.96x1.33




SCALE 4:1

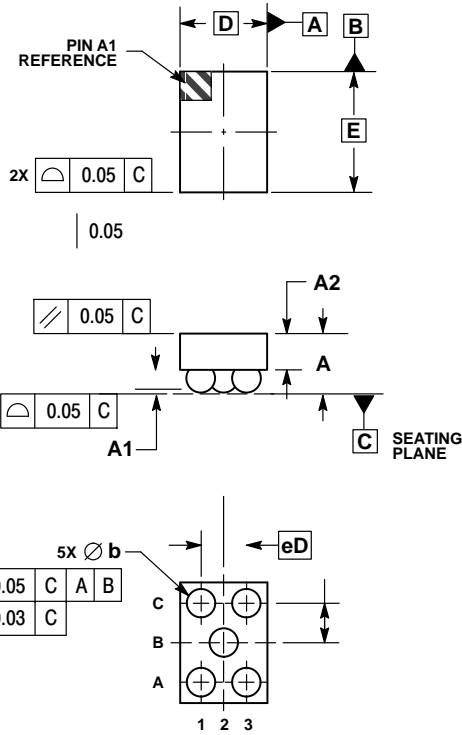

| MILLIMETERS | | |
|-------------|-----|-----|
| DIM | MIN | MAX |
| A | | |
| A1 | | |

| | | |
|----|--|--|
| b | | |
| D | | |
| E | | |
| eD | | |
| eE | | |

SOLDERING FOOTPRINT*



| | | |
|------------------|-------------------|-------------|
| DOCUMENT NUMBER: | 98AON49808E | |
| DESCRIPTION: | WLCSP5, 0.96X1.33 | PAGE 1 OF 1 |





onsemi

onsemi

onsemi

onsemi

— — — — —
— onsemi —
— onsemi —

onsemi

onsemi

onsemi

