1.3 Wa Ad Pe Ampfe Fag TO Tme

The NCP2990 is an audio power amplifier designed for portable communication device applications such as mobile phone applications. The NCP2990 is capable of delivering 1.3 W of continuous average power to an 8.0 Ω BTL load from a 5.0 V power supply, and 1.0 W to a 4.0 Ω BTL load from a 3.6 V power supply.

The NCP2990 provides high quality audio while requiring few external components and minimal power consumption. It features a low–power consumption shutdown mode, which is achieved by driving the SHUTDOWN pin with logic low.

The NCP2990 contains circuitry to prevent from "pop and click" noise that would otherwise occur during turn–on and turn–off transitions. It is a zero pop noise device when a single ended audio input is used.

For maximum flexibility, the NCP2990 provides an externally controlled gain (with resistors), as well as an externally controlled turn–on time (with the bypass capacitor). When using a 1 μ F bypass capacitor, it offers 60 ms wake up time.

Due to its superior PSRR, it can be directly connected to the battery, saving the use of an LDO.

This device is available in a 9-Pin Flip-Chip CSP (Lead-Free).

Features

- 1.3 W to an 8.0 Ω BTL Load from a 5.0 V Power Supply
- Superior PSRR: Direct Connection to the Battery
- Zero Pop Noise Signature with a Single Ended Audio Input
- Ultra Low Current Shutdown Mode: 10 nA
- 2.2 V-5.5 V Operation
- External Gain Configuration Capability
- External Turn-on Time Configuration Capability: 60 ms (1 µF Bypass Capacitor)
- Up to 1.0 nF Capacitive Load Driving Capability
- Thermal Overload Protection Circuitry
- •

PIN DESCRIPTION

Pin	Туре	Symbol	Description
A1	I	INM	Negative input of the first amplifier, receives the audio input signal. Connected to the feedback resistor R_{f} and to the input resistor R_{in} .
A2	0	OUTA	Negative output of the NCP2990. Connected to the load and to the feedback resistor Rf.
A3	I	INP	Positive input of the first amplifier, receives the common mode voltage.
B1	I	VM_P	Power Analog Ground.
B2	I	VM	Core Analog Ground.
B3	I	Vp	Positive analog supply of the cell. Range: 2.2 V–5.5 V.
C1	I	BYPASS	Bypass capacitor pin which provides the common mode voltage (Vp/2).
C2	0	OUTB	Positive output of the NCP2990. Connected to the load.
C3	I	SHUTDOWN	The device enters in shutdown mode when a low level is applied on this pin.

MAXIMUM RATINGS (Note 1)

Rating	Symbol	Value	Unit
Supply Voltage	Vp	6.0	V
Operating Supply Voltage	Ор Vр	2.2 to 5.5 V 2.0 V = Functional Only	-
Input Voltage	V _{in}	-0.3 to Vcc +0.3	V
Max Output Current	lout	500	mA
Power Dissipation (Note 2)	Pd	Internally Limited	-

Operating Ambient Temperature

T416.88 Tm-0.0119 Tc[(Operatin.72ef59.76 426 277.2 0.96 426.72 etrefBT8 0 0 8 426


imits apply for T	A between -40° C to $+85^{\circ}$ C (Unless oth	erwise noted	I).


Characteristic	Symbol	Conditions	Min (Note 6)	Тур	Max (Note 6)	Uni
Supply Quiescent Current	I _{dd}	$V_p = 2.6$ V, No Load $V_p = 5.0$ V, No Load	-	1.5 1.7	4	mA
		$V_p = 2.6$ V, 8 Ω $V_p = 5.0$ V, 8 Ω	-	1.7 1.9	5.5	
Common Mode Voltage	V _{cm}	_	4.197		•	

<u> </u>							
		 _	 				
	-	 					
	-	 	 				
	-						

Figure 2. THD+N versus Output Power

10s2	TD0.647 TE	(800)2.0Tr r	(6)Tj10 (80	0)TI	
800					
600					
400					
200					



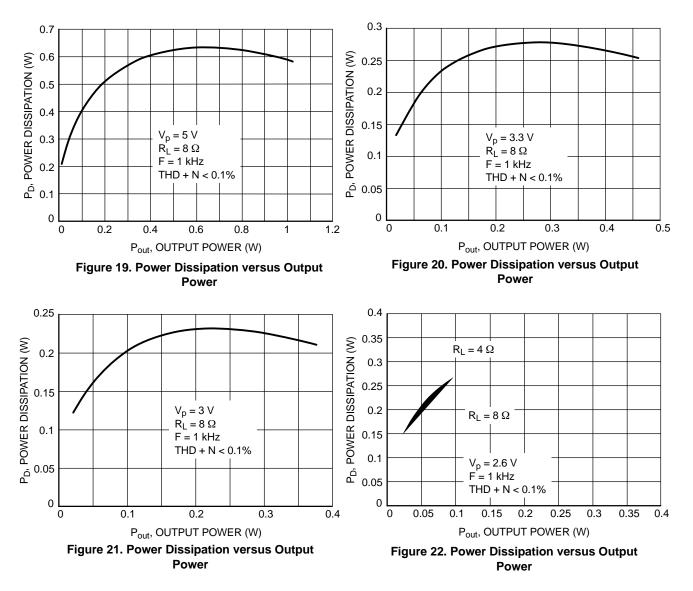

APPLICATION INFORMATION

Detailed Description

The NCP2990 audio amplifier can operate under 2.6 V until 5.5 V power supply. With less than 1% THD + N, it can deliver up to 1.2 W RMS output power to an 8.0 Ω load (V_P = 5.0 V). If application allows to reach 10% THD + N, then 1.6 W can be provided using a 5.0 V power supply.

The structure of the NCP2990 is basically composed of two identical internal power amplifiers; the first one is externally configurable with gain–setting resistors R_{in} and R_f (the closed–loop gain is fixed by the ratios of these resistors) and the second is internally fixed in an inverting unity–gain configuration by two resistors of 20 k Ω . So the load is driven differentially through OUTA and OUTB outputs. This configuration eliminates the need for an output coupling capacitor.

Internal Power Amplifier

The output PMOS and NMOS transistors of the amplifier were designed to deliver the output power of the specifications without clipping. The channel resistance (R_{on}) of the NMOS and PMOS transistors does not exceed 0.6 Ω when they drive current.

The structure of the internal power amplifier is composed of three symmetrical gain stages, first and medium gain stages are transconductance gain stages to obtain maximum bandwidth and DC gain.

Turn-On and Turn-Off Transitions

A cycle with a turn-on and turn-off transition is illustrated with plots that show both single ended signals on the previous page.

In order to eliminate "pop and click" noises during

Gain-Setting Resistor Selection (Rin and Rf)

Rin and Rf set the closed-loop gain of the amplifier.

In order to optimize device and system performance, the NCP2990 should be used in low gain configurations.

The low gain configuration minimizes THD + noise values and maximizes the signal to noise ratio, and the amplifier can still be used without running into the bandwidth limitations.

A closed loop gain in the range from 2 to 5 is recommended to optimize overall system performance.

An input resistor (R_{in}) value of 22 k Ω is realistic in most of applications, and doesn't require the use of a too large capacitor C_{in} .

Input Capacitor Selection (C_{in})

The input coupling capacitor blocks the DC voltage at the amplifier input terminal. This capacitor creates a high-pass filter with R_{in} , the cut-off frequency is given by $f_{c} = \frac{1}{1}$

 ${\rm fc}\,=\,\frac{1}{2\,{}^{*}\,\Pi\,{}^{*}\,R_{in}\,{}^{*}\,C_{in}}\;.$

The size of the capacitor must be large enough to couple in low frequencies without severe attenuation.

An input capacitor value between 33 nF and 220 nF performs well in many applications (With $R_{in} = 22 \text{ K}\Omega$).

Bypass Capacitor Selection (Cby)

The bypass capacitor Cby provides half–supply filtering and determines how fast the NCP2990 turns on. With a single–ended audio input, the amplifier will be a zero pop noise device no matter the bypass capacitor.

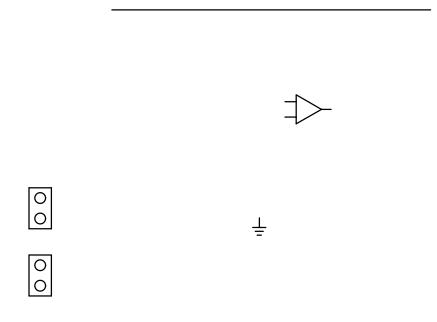


Figure 25. Schematic of the NCP2990 Demonstration Board

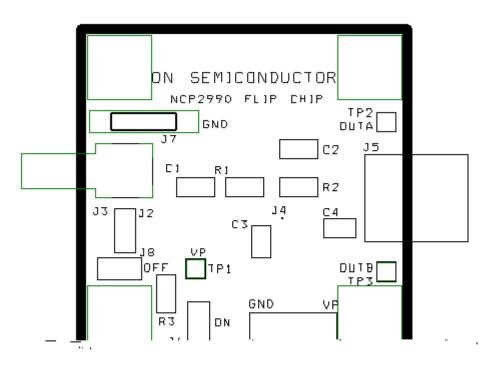


Figure 26. Demonstration Board for 9–Pin Flip–Chip CSP Device – Silkscreen Layers

BILL OF MATERIAL

Item	Part Description	Ref.	PCB Footprint	Manufacturer	Manufacturer Refer- ence
1	NCP2990 Audio Amplifier	-	-	ON Semiconductor	NCP2990
2	SMD Resistor 20 KΩ	R1, R2	0805	Panasonic	ERJ-6GEYJ203V
4	SMD Resistor 150 K Ω	R3	0805	Panasonic	ERJ-6GEYJ203V
5	Ceramic Capacitor 47 nF 100 V X7R	C1	0805	TDK	C2012X7R2A473K
6	Ceramic Capacitor 1.0 µF 10 V X7R	C3, C4	0805	TDK	C2012X7R1A105K
7	Jumper Header Vertical Mount, 2 positions, 100 mils	J2, J6, J18	100 mils	Tyco Electronics / AMP	5-826629-0
8	I/O Connector, 2 positions	J1, J5	200 mils	Phoenix Contact	1757242
9	Jumper Connector	J7	400 mils	Harwin	D3082-B01
10	Not Mounted	C2, TP1, TP2, TP3	-	-	-

ORDERING INFORMATION

Device	Marking	Package	Shipping [†]
NCP2990FCT2G	MBA	9–Pin Flip–Chip CSP (Pb–Free)	3000/Tape and Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.



DATE 30 JUN 2004

SCALE 4:1

	MILLIMETERS				
DIM	MIN	MAX			
Α	0.540	0.660			
A1	0.210	0.270			
A2					

onsemi, , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or incruit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi