

Surface-Mount Silicon Pin Photodiode

QSB34GR, QSB34ZR, QSB34CZR

PLCC 2 LEAD CASE 776AX

Features

- Daylight Filter (QSB34GR and QSB34ZR Only)
- Surface–Mount Packages:
 - QSB34GR / QSB34CGR for Over–Mount Board
 - QSB34ZR / QSB34CZR for Under-Mount Board
- Fast PIN Photodiode
- Wide Reception Angle: 120°
- Large Chip Size: 3 mm x 3 mm
- Sensitive Area: 2.55 mm x 2.55 mm
- High Sensitivity
- Low Capacitance
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

SCHEMATIC

ORDERING INFORMATION

Part Number	Operating Temperature	Package	Shipping [†]
QSB34GR	−25 to +85°C	PLCC 2 Lead, case 776AX (Pb-Free)	1000 / Tape & Reel
QSB34ZR		PLCC 2 Lead, case 776AY (Pb-Free)	
QSB34CGR		PLCC 2 Lead, case 776AX (Pb-Free)	
QSB34CZR		PLCC 2 Lead, case 776AY (Pb-Free)	

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

QSB34GR, QSB34ZR, QSB34CGR, QSB34CZR

MAXIMUM RATINGS				

QSB34GR, QSB34ZR, QSB34CGR, QSB34CZR

TYPICAL PERFORMANCE CHARACTERISTICS

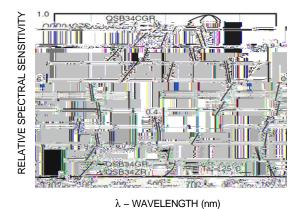


Figure 1. Relative Spectral Sensitivity vs. Wavelength

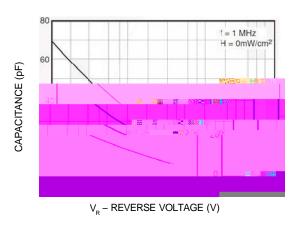


Figure 3. Capacitance vs. Reverse Voltage


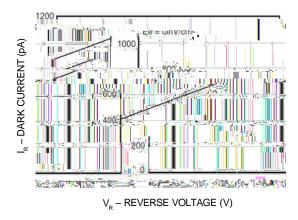


Figure 5. Dark Current vs. Reverse Voltage

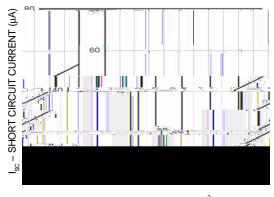

Ee - IRRADIANCE (mW/cm²)

Figure 2. Short Circuit Current vs. Irradiance


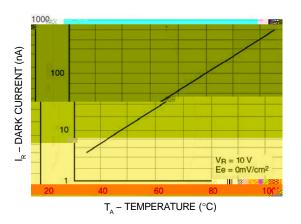


Figure 4. Dark Current vs. Temperature



11 10/12 1120.0 1/11 102 (11)

Figure 6. Response Time vs. Load Resistance

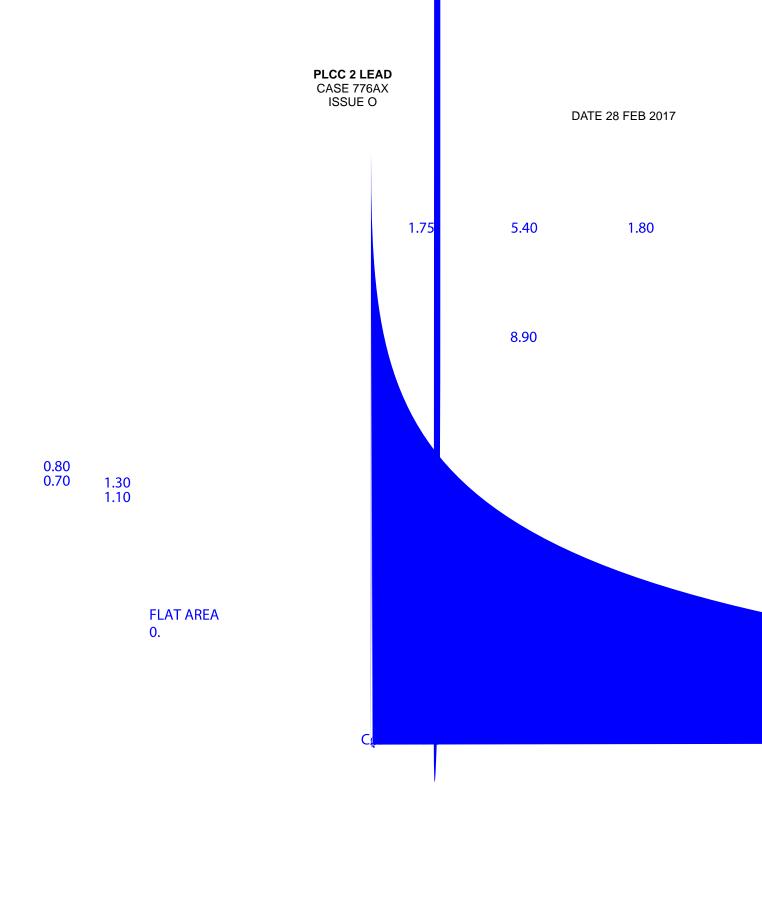

CASE 776AY ISSUE O

DATE 28 FEB 2017

PACKAGE
CENTER
CHIP
ANODE
CENTER

1.75 5.40 1.80

8.9

CHIP

0.175 .70 6.10

TOP VIEW

PHOTOSENSITIVE SURFACE

FRONT VIEW SI

