



GC

E159

Description

SIDELOOKER OPTOLOGIC
CASE 100CM

Features

-
-
-
-
-
-
-
-
-
-

INPUT/OUTPUT TABLE

Part Number	Light	Output
QSE159	On	LOW
	Off	HIGH

See detailed ordering and shipping information on page 5 of this data59 -et 4.2796 I316

Block Diagram

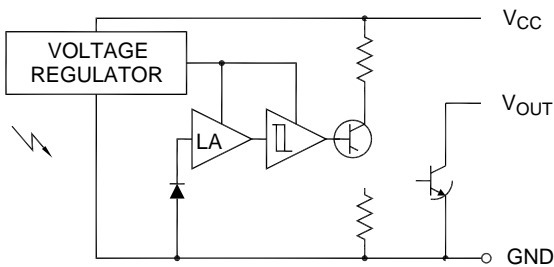


Figure 1. QSE159 Open-Collector Output Inverter

QSE159

MAXIMUM RATINGS (T_A = 25°C unless otherwise specified)

Symbol	Parameter	Rating	Unit
T _{OPR}	Operating Temperature	-40 to +85	°C
T _{STG}	Storage Temperature	-40 to +100	°C
T _{SOL-I}	Soldering Temperature (Iron) (Notes 2, 3, 4)	240 for 5 s	°C
T _{SOL-F}	Soldering Temperature (Flow) (Notes 2, 3)	260 for 10 s	°C
I _O	Output Current	50	mA
V _{CC}	Supply Voltage	4.0 to 16	V
V _O	Output Voltage	35	V
P _D	Power Dissipation (Note 1)	100	mW

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Derate power dissipation linearly 2.50 mW/°C above 25°C.
2. RMA flux is recommended.
3. Methanol or isopropyl alcohols are recommended as cleaning agents.
4. Soldering iron 1/16" (1.6 mm) minimum from housing.

ELECTRICAL CHARACTERISTICS (T

QSE159

TYPICAL PERFORMANCE CURVES

(Sensor Coupled to QEE113 Emitter)

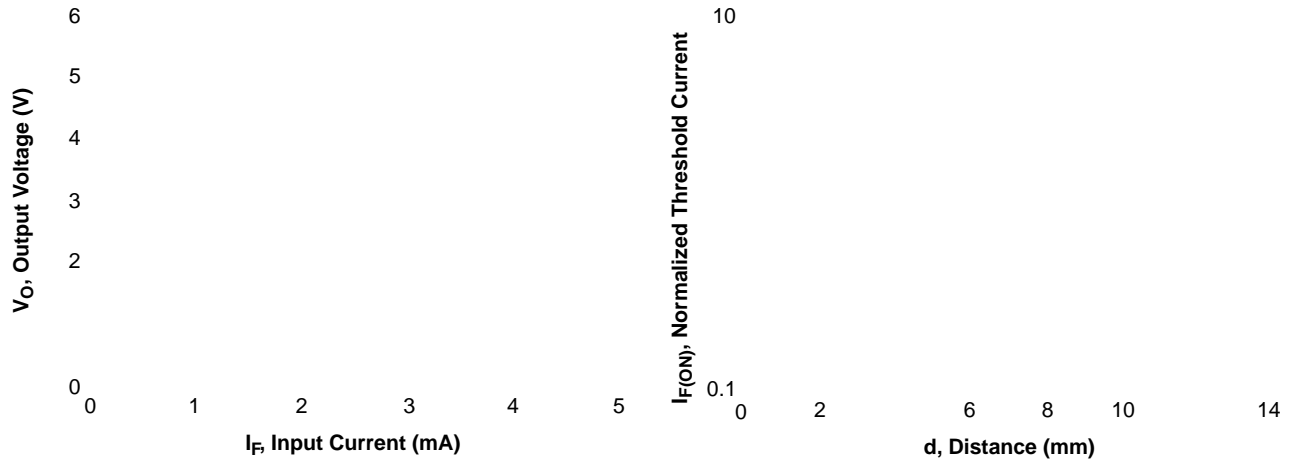


Figure 2. Output Voltage vs. Input Current

Figure 3. Threshold Current vs. Distance

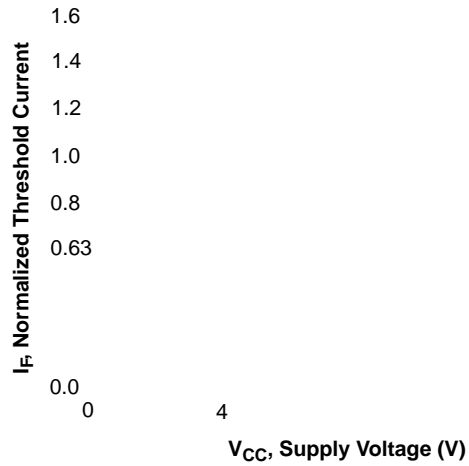


Figure 4. Normalized Threshold Current vs. Supply Voltage

TYPICAL PERFORMANCE CURVES (continued)
 (Sensor Coupled to QEE113 Emitter)

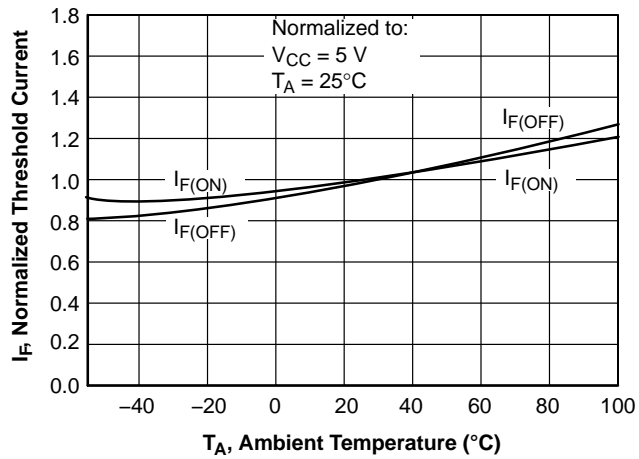


Figure 5. Normalized Threshold Current vs. Ambient Temperature

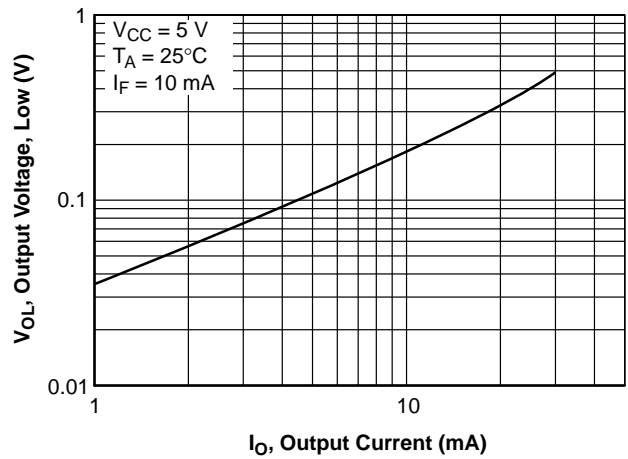


Figure 6. Low Output Voltage vs. Output Current

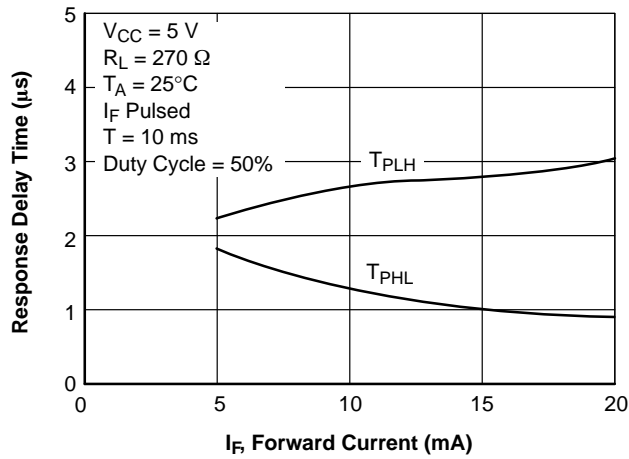


Figure 7. Response Time vs. Forward Current

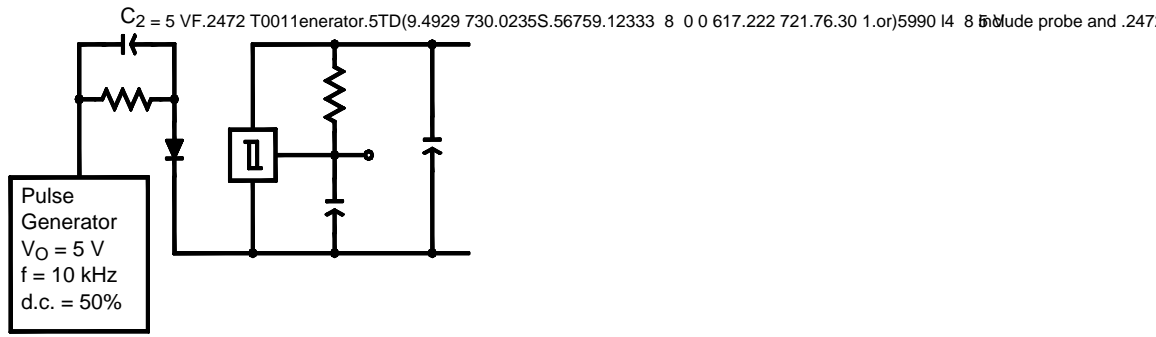


Figure 8. Switching Speed Test Circuit

Figure 9. Switching Times Definitions

SIDELOOKER OPTOLOGIC 4.44x5.08x2.54, 1.90P
CASE 100CM
ISSUE A

DATE 05 MAR 2024

NOTES:
1. D

END VIEW

L 12.70
L1 1.27

		D	0.64	0.76	0.8~
					D
		b	0.78	—————	
	13.46	---			
	1.				
				52	1.78
L2	2.29	2.54	2.79		

onsemi, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi**
