


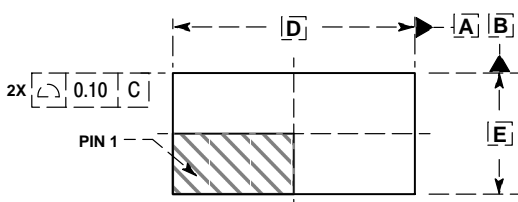


WDFN16 4x2, 0.5P
CASE 511BL-01
ISSUE O

MIN MAX 0.894.00133663.49MILLIMETERS 29.35420164 4155119103.6

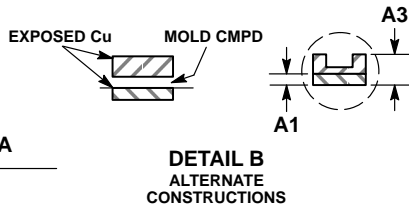

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. DIMENSIONS b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 MM FROM TERMINAL TIP.
 4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

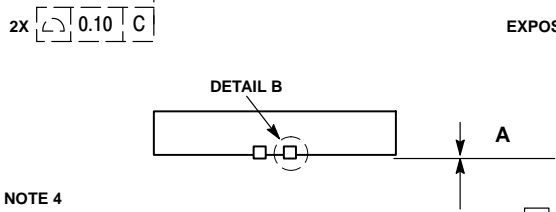


	0.20 REF
D	4.00 BSC
E	2.00 BSC
e	0.50 BSC
L1	0.05 0.15


NOTE 4

TOP VIEW

GENERIC MARKING DIAGRAM*



- XX = Specific Device Code
- M = Date Code
- = Pb-Free Package

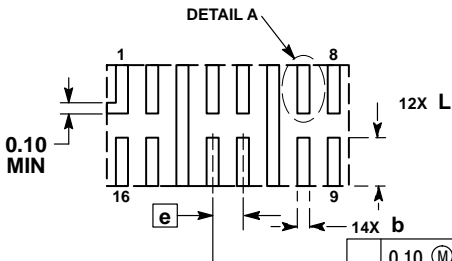


SIDE VIEW

⊕	0.10 (M)	C	A	B
	0.05 (M)	C	NOTE 3	

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present.

RECOMMENDED MOUNTING FOOTPRINT

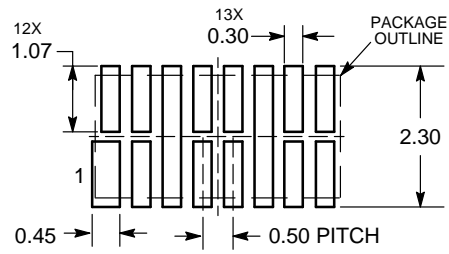

DIMENSIONS: MILLIMETERS

BOTTOM VIEW